



PS 4500.R1.M Precision Balance, PS 1000.R1 Precision Balance, PS 3500.R1.M Precision Balance, PS 750.R1 Precision Balance, PS 6100.R1.M Precision Balance, PS 360.R1 Precision Balance, PS 200/2000.R1 Precision Balance, PS 600.R1 Precision Balance

More information on the website  
[radwag.com/en/info,w1,TUN](http://radwag.com/en/info,w1,TUN)



PS 4500.R1.M Precision Balance  
PS 3500.R1.M Precision Balance  
PS 6100.R1.M Precision Balance

PS 1000.R1 Precision Balance  
PS 750.R1 Precision Balance  
PS 360.R1 Precision Balance  
PS 200/2000.R1 Precision Balance  
PS 600.R1 Precision Balance

The drawings, photos and graphics used are for illustrative purposes only.

## Functions



Autotest



Dosing



Percent Weighing



Totalizing



Parts counting



Peak hold



Newton unit measurement



Statistics



Checkweighing



GLP Procedures



Animal weighing



Density determination

# Datasheet

	PS 200/2000.R1 Precision Balance	PS 360.R1 Precision Balance	PS 600.R1 Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	200 / 2000 g	360 g	600 g
<b>Minimum load</b>	20 mg	20 mg	20 mg
<b>Readability [d]</b>	0,001 / 0,01 g	0,001 g	0,001 g
<b>Tare range</b>	-2000 g	-360 g	-600 g
<b>Repeatability (Max)</b>	0,001 / 0,01 g	0,001 g	0,0015 g
<b>Repeatability (5% Max)</b>	0,0005 / 0,005 g	0,0005 g	0,0005 g
<b>Linearity</b>	±0,002 / 0,02 g	±0,002 g	±0,002 g
<b>Stabilization time</b>	2 / 1,5 s	2 s	2 s
<b>Adjustment</b>	external	external	external
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	LCD (backlit)	LCD (backlit)	LCD (backlit)
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper ×1, bumper ×3, power supply.
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	128×128 mm
<b>Device dimensions</b>	—	—	—
<b>Packaging dimensions</b>	470×380×336 mm	470×380×336 mm	470×380×336 mm
<b>Net weight</b>	3,2 kg	3,2 kg	3,2 kg
<b>Gross weight</b>	4,8 kg	4,8 kg	4,8 kg
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232, USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
<b>Power consumption max.</b>	—	—	—
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Storage temperature</b>	—	—	—
<b>Relative humidity</b>	—	—	—

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 750.R1 Precision Balance	PS 1000.R1 Precision Balance	PS 3500.R1.M Precision Balance
<b>Metrological parameters</b>			
<b>Maximum capacity [Max]</b>	750 g	1000 g	3500 g
<b>Minimum load</b>	20 mg	20 mg	500 mg
<b>Readability [d]</b>	0,001 g	0,001 g	0,01 g
<b>Tare range</b>	-750 g	-1000 g	-3500 g
<b>Repeatability (Max)</b>	0,0015 g	0,0015 g	0,008 g
<b>Repeatability (5% Max)</b>	0,0005 g	0,0005 g	0,005 g
<b>Linearity</b>	±0,003 g	±0,003 g	±0,02 g
<b>Stabilization time</b>	2 s	2 s	1,5 s
<b>Adjustment</b>	external	external	external
<b>Physical parameters</b>			
<b>Leveling system</b>	manual	manual	manual
<b>Display</b>	LCD (backlit)	LCD (backlit)	LCD (backlit)
<b>Protection class</b>	IP 43	IP 43	IP 43
<b>Delivery components</b>	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, grounding bumper x1, bumper x3, power supply.	Balance, weighing pan, weighing pan shield, power supply
<b>Weighing pan dimensions</b>	128×128 mm	128×128 mm	195×195 mm
<b>Device dimensions</b>	—	—	—
<b>Packaging dimensions</b>	470×380×336 mm	370×290×465 mm	470×380×336 mm
<b>Net weight</b>	3,2 kg	3,2 kg	3,6 kg
<b>Gross weight</b>	4,8 kg	4,8 kg	5,1 kg
<b>Communication interface</b>			
<b>Communication interface</b>	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>			
<b>Power supply</b>	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
<b>Power consumption max.</b>	—	—	—
<b>Environmental conditions</b>			
<b>Operating temperature</b>	+10 ÷ +40 °C	+10 ÷ +40 °C	+10 ÷ +40 °C
<b>Storage temperature</b>	—	—	—
<b>Relative humidity</b>	—	—	—

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

# Datasheet

	PS 4500.R1.M Precision Balance	PS 6100.R1.M Precision Balance
<b>Metrological parameters</b>		
Maximum capacity [Max]	4500 g	6100 g
Minimum load	0,5 g	0,5 g
Readability [d]	0,01 g	0,01 g
Tare range	-4500 g	-6100 g
Repeatability (Max)	0,008 g	0,008 g
Repeatability (5% Max)	0,005 g	0,005 g
Linearity	±0,02 g	±0,03 g
Stabilization time	1,5 s	1,5 s
Adjustment	external	external
<b>Physical parameters</b>		
Leveling system	manual	manual
Display	LCD (backlit)	LCD (backlit)
Protection class	IP 43	IP 43
Delivery components	Balance, weighing pan, weighing pan shield, power supply	Balance, weighing pan, weighing pan shield, power supply
Weighing pan dimensions	195×195 mm	195×195 mm
Device dimensions	333×206×107 mm	333×206×107 mm
Packaging dimensions	470×380×336 mm	470×380×336 mm
Net weight	4,5 kg	4,5 kg
Gross weight	6,1 kg	6,1 kg
<b>Communication interface</b>		
Communication interface	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)	2×RS232 <sup>1</sup> , USB-A, USB-B, Wi-Fi (option)
<b>Electrical parameters</b>		
Power supply	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max	Adapter: 100 – 240V AC 50/60Hz 0,6A; 12V DC 1,2A Balance: 12 – 15V DC 0,4A max
Power consumption max.	4 W	—
<b>Environmental conditions</b>		
Operating temperature	+10 ÷ +40 °C	+10 ÷ +40 °C
Storage temperature	-20 ÷ +50 °C	-20 ÷ +50 °C
Relative humidity	—	40% ÷ 80%

Repeatability is expressed as a standard deviation from 10 weighing cycles. Stabilization time depends on the ambient conditions and the dynamics of weighing pan loading; specified for FAST profile. 1 Barcode scanners, available as weighing instrument accessory, communicate with the instrument via RS232 interface exclusively.

\* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



## Accessories

Balance Storage Case  
Barcode scanners  
Cigarette lighter receptacle power supply cables  
USB cable (scale - printer)  
Density determination KIT  
Power Adapters

Draft Shield  
Protective cover for balances  
Receipt Printer  
RPANEL BOX  
RS 232, RS 485 cables  
Under-Pan Weighing Rack

Anti-Draft Chamber for Balances with a 128×128 mm Weighing Pan  
Antivibration Tables  
Displays

RS 232 cables (scale - printer)  
Under-pan weighing


## Software

RAD-KEY  
R Panel  
R-LAB  
E2R System



LabVIEW Driver  
Alibi Reader  
RADWAG Development Studio  
R.Barcode

## Device dimensions



PS 4500.R1.M Precision Balance, PS 1000.R1 Precision Balance, PS 3500.R1.M Precision Balance, PS 750.R1 Precision Balance, PS 6100.R1.M Precision Balance, PS 360.R1 Precision Balance, PS 200/2000.R1 Precision Balance, PS 600.R1 Precision Balance

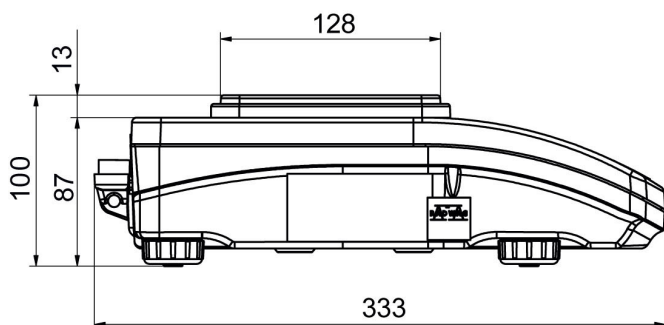

PS R, d = 1mg

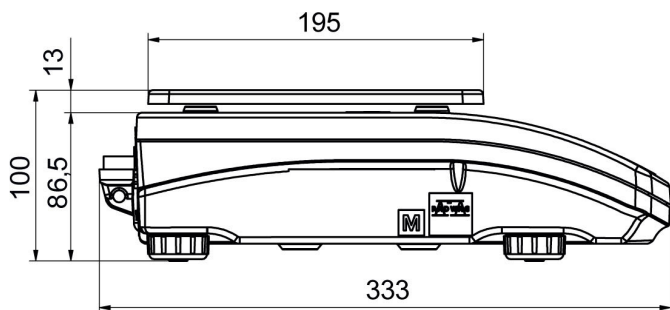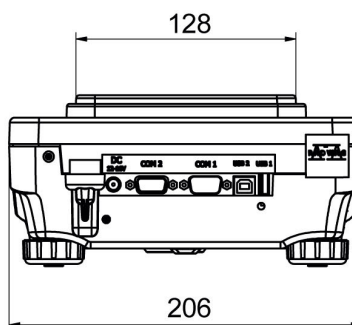

PS R, d = 10 mg

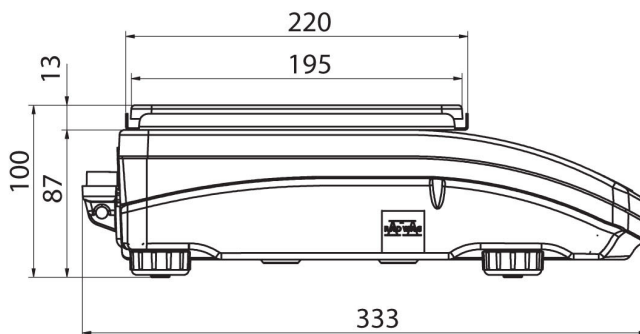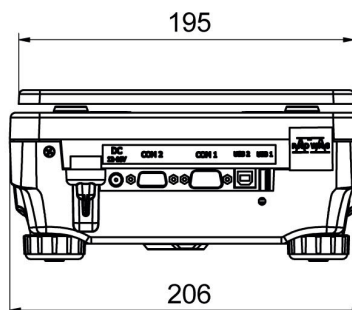

PS R.M, d = 10 mg

